

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/SE04/001774

International filing date: 30 November 2004 (30.11.2004)

Document type: Certified copy of priority document

Document details: Country/Office: SE  
Number: 0303223-2  
Filing date: 01 December 2003 (01.12.2003)

Date of receipt at the International Bureau: 28 December 2004 (28.12.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

PCT/SE 2004 / 0 0 1 7 7 4

## Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.




(71) Sökande CernoluX AB, Täby SE  
Applicant (s)

(21) Patentansökningsnummer 0303223-2  
Patent application number

(86) Ingivningsdatum 2003-12-01  
Date of filing

Stockholm, 2004-12-03

För Patent- och registreringsverket  
For the Patent- and Registration Office

  
Gunilla Larsson

Avgift  
Fee

PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

## Wavelength selective device

### **Technical field of the invention**

The present invention relates to a wavelength selective optical coupling device and  
 5 corresponding method, use and array, all of them particularly useful in communication networks utilising fiber optic wavelength division multiplexing.

### **Background of the invention**

Wavelength selective optical coupling devices according to related art for optical  
 10 add/drop multiplexing are used to extract a single wavelength or several wavelengths from a broadband optical signal, or to add a single wavelength to a broadband optical signal. Such devices are typically used in fiber optic networks utilising wavelength-division multiplexing, to add or drop wavelength channels to/from an optical fiber.

15 Most optical add/drop multiplexers used today are fixed. That is, the wavelength to be added or dropped is determined by device design and cannot be changed after the device has been manufactured. To allow for more dynamic and flexible planning of the traffic in the optical networks, reconfigurable optical add/drop multiplexers are  
 20 being developed. With these devices it is possible to change the wavelength channel to be added or dropped also after the device has been installed in the network. Thus, the network can more efficiently be controlled in terms of traffic provisioning and protection switching.

25 A common implementation of reconfigurable optical add/drop multiplexers is to use a demultiplexer to split up the incoming broadband light signal into separate waveguides for each wavelength channel. With 2-by-2 crossbar switches on each channel waveguide, it is possible to select which wavelengths to be added/dropped. After the switches, a multiplexer is used to recombine all wavelengths channels into

a common output waveguide. This kind of reconfigurable optical add/drop multiplexer is described in the review article "The wavelength add/drop multiplexer for lightwave communication networks", Bell Labs Technical Journal, Jan-Mar 1999, p. 207-209 by C.R. Giles and M. Spector.

5

A drawback associated with the solution above is that the multiplexers are expensive and have large transmission loss. Thus, an alternative solution, without the (de-)multiplexers, is the broadcast-and-select solution. This implementation is discussed in the paper "Broadcast-and-select OADM enables low-cost transparency", Lightwave, Dec. 2001 by J. Bayne and M. Sharma. In this implementation a coupler is used to tap off a part of the optical power from all channels. The tapped broadband signal is directed towards one or more narrow band channel filters. These channel filters select the wavelengths that shall be dropped from the network. The optical signal that was not tapped off by the coupler is directed towards a wavelength blocker that attenuates the wavelengths channels that were dropped by the channel filters. Thus, after the wavelength blocker, new information can be added to the dropped wavelength channels.

10

15

20

Some common disadvantages with both the solutions above are that many different components are required to implement the add/drop functionality. Thus, the optical add/drop device becomes expensive. Furthermore, with all the different components the light must pass, there will be substantial optical loss. This loss must be compensated for by optical amplifiers, which further increase the cost for the implementation.

25

Simpler optical add/drop solutions can be implemented using fiber Bragg gratings and circulators. Here the incoming broadband signal is coupled from port 1 of the circulator to its port 2, where a fiber Bragg grating is reflecting one or more wavelength channels. The reflected channels are now entering port 2 of the circulator and are dropped in its port 3. To add new information to the dropped channels, a second

30

circulator is used. Signals that are to be added enter a second circulator and exit from there towards the fiber Bragg grating, where the selected wavelength channels to be added are reflected. The added wavelength channels then pass through the second circulator. The wavelength channels that are not reflected by the fiber Bragg grating, pass straight through the first circulator, the fiber Bragg grating and the second circulator. The implementation of this kind of optical add/drop multiplexer is also discussed in the previously mentioned review article by Giles and Spector, to which reference is made.

By means of the solution above, some complexity and thereby cost can be reduced. However, the circulators incur loss on the express traffic, i.e. the traffic that is not added or dropped, and thus only a few optical add/drop multiplexers can be added to a fiber network before optical amplifiers have to be added.

A solution directed towards coupling out a selected wavelength channel from a wavelength-division multiplexed broadband signal is disclosed in US patent 4,466,694. Wavelengths that are not to be coupled out from a waveguide are meant to pass a described device with negligible loss. A disadvantage associated with the suggested implementation, however, is that light is only coupled out from the waveguide to radiation modes. Thus, the device will function merely as a wavelength-selective attenuator, but not for optical add/drop multiplexing, where light should be coupled between waveguides.

The ideas described above are further discussed in US patent 6,501,879, in which two different implementations are described of how a wavelength-selective coupler according to that disclosed in US patent 4,466,694 can be used for optical add/drop multiplexing. In a first example, the wavelength-selective coupler is used together with circulators, in a similar manner as the fiber Bragg grating is used in the example above. A disadvantage of this solution is that the wavelength selective coupler only reflects light, when light is coupled out orthogonally from the waveguide in to

the surrounding external resonator. Thus, to be able to tune this device, the grating period in the waveguide has to be changed simultaneously with the surrounding optical resonator.

5 In the second optical add/drop multiplexer implementation according to US patent 6,501,879, two wavelength-selective couplers are used in series to retro-reflect the wavelength channel to be dropped. However, the same disadvantage remains in this implementation as in the previously mentioned implementation, namely that the waveguide grating has to be tuned to couple the selected light orthogonally out from  
10 the waveguide and in to the external resonator.

Based on the above, a solution to the mentioned problems in association with related art is desirable.

### 15 ***Summary of the invention***

It is therefore an object of the present invention to alleviate the previously mentioned shortcomings of related art. This is accomplished by a device, method, array and use of a device for optical coupling comprising

20 first and second optical waveguides extending longitudinally with cores adapted to guide optical radiation,

first resonator means, laterally surrounding the first waveguide, comprising first and second resonator members, and second resonator means, laterally surrounding the second waveguide, comprising third and fourth resonator members, characterised in that

25 first and second deflector means, adapted to couple radiation propagating in the respective first and second waveguides with common radiation modes, which modes are defined by adjustable geometrical and material properties of the device, so as to obtain wavelength selective coupling of radiation guided by the first and second waveguides, provided the resonator means are tuned to the same resonance wavelength.  
30

The present invention is directed to an optical device capable of coupling light propagating in a bound mode in one waveguide to another bound mode of a parallel waveguide. As the coupling is performed only for selected wavelengths, this device is ideally used as an optical add/drop multiplexer in communication networks utilising fiber optic wavelength division multiplexing.

The wavelength selective optical coupler, described in this invention, comprises two essentially parallel waveguide structures. In each waveguide structure there is a deflector structure manufactured in the light guiding structure of the waveguide. Each waveguide structure is surrounded by an external resonator. In between the two external resonators, there could be arranged one or more internal resonators.

The internal resonators could be a requirement for the constructional practice for the implementation of the present invention. It is however important, that light transmitted through these internal resonators does not perceive any transmission resonances for the wavelength range of interest, as at the transmission resonances due to this internal resonator will provide narrow wavelength regions with a very strong coupling between the waveguides. The best way of preventing these transmission resonances is to make the internal resonators thin, so that the free spectral range of the internal resonators is larger than the wavelength range of interest, and to design the transmission wavelength resonances to surround the wavelength area of interest.

The functionality of the two waveguide structures is to guide light along the waveguides in bound modes. The transverse, i.e. the direction which is orthogonal to the propagation direction, spatial distribution of the bound modes is mainly determined by each of the waveguide structures and the light distribution should be designed to be localized to the region of the waveguide cores. Thus, in regions where there are no deflection structures in the waveguides, light will propagate without losses and without any coupling between the waveguides.

The deflection structures in the waveguides are used for coupling light between the bound modes and the radiation modes of the total waveguide structure. Light will be efficiently coupled between the bound modes and the radiation modes, if the coupling process is phase matched both along the main propagation direction, defined by the parallel waveguides, and in the transverse direction, the direction within the plane defined by the parallel waveguides and orthogonal to the propagation direction.

The transverse spatial distribution of the radiation modes is determined by the whole device structure, comprising both the waveguide structures and the different surrounding resonators. At certain wavelengths there will be radiation modes that are resonant with at least one of the external resonator. At these wavelengths, the resonant radiation modes will mainly be localized to the corresponding resonant external resonator. If the resonant resonator is surrounding a waveguide with a grating and the coupling process between the radiation mode and the guided mode is phase matched, there will be a strong coupling in that resonator between the bound mode and the resonant radiation mode. Thus, the external resonators are used for controlling at what wavelengths there should be strong coupling between the guided and the radiation modes.

To couple light at a certain wavelength from a bound mode of one of the waveguides to another bound mode at the other waveguide, the two external resonators, surrounding each of the waveguides, should be resonant. If both external resonators are resonant at the specific wavelength, and for external resonators with optimized mirror reflectivities all light will couple over between the waveguides. Thus, the invention functions like an ideal wavelength selective coupler. As it is possible to adjust the separation between the mirrors of each of the external cavities, the wavelength for efficient coupling can be tuned.



If none of the external resonators are resonant or if only one of the external resonators is resonant, the coupling between the waveguides at the specific wavelength will be very small. Thus, loss due to coupling, i.e. cross-talk, will be minimal for wavelengths that are not resonant to both of the two external resonators surrounding each of the waveguides. An implication of this property is that many devices can be cascaded without building up large transmission loss or large cross-talk.

When changing the coupling wavelength for the device, it is very important that losses or cross-talk are not incurred on wavelength channels that are not going to be coupled. This is called hit-less tuning. With the present invention, this can be accomplished by first tuning one of the external resonators to the new coupling wavelength and then tuning the second external resonator. By means of this method, the two external resonators are only simultaneously resonant at the start wavelength and at the stop wavelength, whereas they are not simultaneously resonant to the wavelengths in between. Thus, hit-less tuning can be achieved with this invention.

In order to further described the present invention, and in particular the related coupling process, reference is made to A. Yariv, Optical Electronics, 3rd ed. (CBS College Publishing, New York, USA, 1985) p. 437. Reference is made since the functionality of the present invention is comparable to that of a directional coupler. However, in a directional coupler, coupling between waveguides occurs due to beating between light launched into two bound modes of the directional coupler waveguide structure, whereas for the present invention the coupling between waveguides occurs in a series of mode-coupling processes; from a bound mode in one waveguide to a radiation mode and then finally to a bound mode in the other waveguide. The advantages of the more developed coupling process of the present invention, however, are that the coupling occurs with much improved wavelength resolution and that the device size can be made smaller, as in the present invention the interaction length along the propagation direction is short and there is no re-

quirement of space-consuming regions where the separation between the waveguides is adiabatically changed.

**Brief description of the drawings**

5 The features, objects, and further advantages of this invention will become apparent by reading this description in conjunction with the accompanying drawings, in which like reference numerals refer to like elements and in which:

10 FIG. 1 shows a cross-sectional view of the present invention, including the waveguides with the deflector regions and the external cavities,

FIG. 2 shows a transverse cross-sectional view of the present invention, including optical fiber waveguides and a cylindrical lens for reducing the transverse beam divergence,

15 FIG. 3 shows a first embodiment of the present invention, including actuators for tuning of the mirror positions,

20 FIG. 4 shows a graph of the light transmitted, according to the embodiment in FIG. 3, when the free spectral range of the external cavities exceeds the wavelength range of interest,

25 FIG. 5 shows a graph of the light transmitted according to the embodiment in FIG. 3, when the free spectral range of the cavities surrounding the waveguides is smaller than the wavelength range of interest,

FIG. 6 shows an embodiment of the present invention, including crossed gratings in the deflector region,

FIG. 7 shows an embodiment of a polarization-independent optical add/drop multiplexer,

5 FIG. 8 shows a block diagram of an add/drop multiplexer, including wavelength blocking devices,

FIG. 9 schematically depicts an embodiment of an optical add/drop multiplexer, where the individual added/dropped wavelength channels are multiplexed/demultiplexed. In this embodiment a wavelength blocker is used, and

10

FIG. 10 shows an embodiment of an optical add/drop multiplexer, of similar functionality as the embodiment depicted in FIG. 9, but without a wavelength blocker.

### **Detailed description**

15 The following description is of the best mode presently contemplated for practising the invention. The description is not to be taken in a limiting sense, but is made merely for the purpose of describing the general principles of the invention. The scope of the invention should be ascertained with reference to the issued claims.

20 The functionality of the present invention is that of a wavelength selective coupler. Light of a certain wavelength, denoted 11 in FIG. 1, is launched into one of the waveguides, 13. By controlling the positions of the mirrors 18, 19 and 28, 29 of the external resonators, light is split up between the two waveguides. The output light signals have reference numerals 12, 22. Thus, for some cavity configurations all light at that particular wavelength can be coupled over to waveguide 23, whereas for other cavity configurations almost all light at this particular wavelength will pass the device undisturbed and exit in the same waveguide as it entered. The same principle applies for light launched into the second waveguide 23. Light at a certain wavelength, launched into the waveguide 23, can exit the device from any of the

25

30

The exact power exiting from the two waveguides is again de-

terminated by the cavity mirror positions. As the invention operates in a linear optical regime, the superposition principle states that light can be launched simultaneously into both waveguides, and, thus, operate as a wavelength-selective crossbar switch or in other terms as an optical add/drop multiplexer for wavelength-division multiplexing fiber optical networks. In the following, preferred embodiments and the functionality will be described in more detail.

The present invention comprises the mentioned two optical waveguides 13, 23, aligned in parallel with the longitudinal optical axis 1 of the system, each surrounded by an external resonator, defined by mirrors 18, 19 and 28, 29. Each waveguide consists of a core region 14, 24 with a higher refractive index than the surrounding material in the waveguide. Thereby the light is guided along a predetermined path, defined by the optical waveguide structure. In the preferred embodiment, the waveguide is an optical fiber. However, the present invention also applies to planar waveguide structures.

In each waveguide there is a deflector region 16, 26 which is depicted in FIG. 1. In a preferred embodiment, the deflector region consists of a fiber Bragg grating. To provide for maximum outcoupling in a direction approximately orthogonal to the propagation direction for the bound modes, the fringes of the fiber Bragg grating are tilted with an angle between the waveguide propagation direction and the normal to the fringes of approximately 45 degrees. However, the exact outcoupling angle,  $\theta$ , is determined by a grating equation:

$$nd(1 - \sin(\theta)) = m\lambda$$

where  $n$  is the effective refractive index in the waveguide,  $d$  is the distance between the fringes parallel to the longitudinal optical axis of the waveguide,  $m$  is an integer, and  $\lambda$  is the vacuum wavelength. The outcoupling angle  $\theta$  is counted positive if the

outcoupled wave has a propagation component in the propagating direction of the incoming wave in the waveguide.

As previously stated, in a preferred embodiment of the invention, the deflector region is defined by a fiber Bragg grating inscribed in the waveguide structure. The extension of the deflector region does not necessarily need to be the same as the core region of the optical fiber, as it is determined by the extension of the UV-illuminated volume of the photosensitive region of the waveguide. In a planar waveguide, the deflector region could be defined again by UV-illumination of photosensitive material, but it could also be defined by a corrugated interface, parallel to the longitudinal optical axis 1, between two materials of different refractive index. The exact shape of the corrugation is determined by the manufacturing process, and could be for instance sinusoidal, saw-tooth or stepped, while other shapes are not excluded.

The exact outcoupling angle is described by the above grating equation. However, the intensity of the light coupled out in that angle is determined by the exact shape of the grating.

The mirrors of the external resonators 18, 19 and 28, 29 for respective waveguide are oriented with their normals essentially parallel to the transverse optical axis 2. However, for reasons of changing the wavelength-selectivity of the device, the mirrors could be oriented with a slight tilt, such that the mirror distances 18 to 19 and 28 to 29 respectively, are not the same at the input of the waveguide structure as at the output of the waveguide structure.

The operation of the present invention will be described in the following. The two waveguides 13, 23 are designed such that they can accommodate at least one guided mode each. The intensity distributions of the guided modes 15, 25 are depicted in FIG. 1. The whole waveguide and cavity structure defines the transverse spatial

distribution of the radiation modes, and the real part of the electric field distribution of one of these radiation modes is denoted 30 in FIG. 1. If the optical path length for a complete roundtrip in any of the cavities is an integer number of wavelengths, the amplitude of the field distribution will be large in that cavity, and the cavity is said to be resonant to that wavelength. In the example of the radiation mode with reference numeral 30 in FIG. 1, that radiation mode is resonant to the two external cavities, surrounding each waveguide, but not resonant to the internal cavity formed in between the two external cavities. If the outer mirrors 19, 29 are fully reflecting, there will be a discrete spectrum of radiation modes. Otherwise there will be a continuous spectrum of radiation modes. In FIG. 1 is schematically drawn a radiation mode for a structure not having fully reflecting outer mirrors, and, thus, having radiation modes extending in the regions above the upper external resonator and below the lower external resonator.

As light guided by a waveguide 13, 23 reaches the deflector region 16, 26, some of it scatters into radiation modes 30. The efficiency of the coupling between the guided mode and the radiation mode depends on the phase matching in both the direction of the longitudinal optical axis 1 and the direction of the transverse optical axis 2. When determining the phase matching along the transverse optical axis, the overlap between the mode function for the guided mode and for the radiation mode is also considered. Thus, if the radiation mode is resonant with the external cavity, its amplitude is large and, thus, the overlap and the coupling can be large. On the other hand, if the radiation mode is not resonant with the external cavity, the coupling with the guided mode of the waveguide in the corresponding external cavity is small.

To couple light from a bound mode in one waveguide, such as that having the reference numeral 13, to a bound mode in the other waveguide, such as 23, the external cavities for both waveguides should be resonant. Under these resonant conditions and if the mirror reflectivities are optimally chosen, all light will couple over from

the first waveguide to the second waveguide. If none of the external cavities are resonant or if only one of the cavities are resonant, then only a very small amount of light will couple from one waveguide to the other waveguide. Thus, under these non-resonant conditions, the transmission loss due to over-coupling is very low.

5

Due to the requirement of phase-matching for efficient coupling between the radiation modes and the guided modes, and vice versa, light that is coupled out from the waveguide to a radiation mode, is always coupled back to a guided mode propagating in the forward-direction. Thus, there will be a very small amount of light in bound modes being reflected at the input side, depicted on the left hand side in FIG. 1 of the waveguides. The only exception appears for wavelengths coupling orthogonally out from the waveguides. This condition is found from the grating equation above to appear when the fringe distance  $d$  takes a value of a multiple times the material wavelength.

15

For optimum coupling to appear between the waveguides, the outer cavity mirrors 19, 29 should be fully, i.e. 100%, reflecting and the reflectivities of the inner cavity mirrors 18, 28 should be take a value of  $1 - R_s$ , where  $R_s$  is the effective reflectivity for each of the deflector regions.

20

For deviations from these optimal mirror reflectivities, the intentional over-coupling of light between the waveguides will be reduced. For outer cavity mirror reflectivities smaller than 100%, light will also be lost by transmission through the outer mirrors 19, 29. The exact amount of light lost through these mirrors depends on the finesse of the cavity and the outer cavity mirror reflectivities. Under conditions when the outer cavity mirror 19, 29 reflectivities are less than 100%, the optimization of the inner cavity mirror 18, 28 becomes more complicated and will be determined by the particular application specifications.

25

In between the two external resonators there could be one or more internal resonators. This internal resonator structure is defined by the all layers and mirrors between the inner mirrors 18, 28 of the external resonators, such that the mirrors 18, 28 form the outer mirrors surrounding the internal resonator. As mentioned above, the internal resonators could be a requirement for the constructional practice for implementing this invention. It is important, however, that light transmitted through these internal resonators does not perceive any transmission resonances due to the internal resonator for the wavelength range of interest, as at the transmission resonances there will be narrow wavelength regions with a strong coupling between the waveguides. The best way of preventing these transmission resonances is to make the internal resonators thin, so that the free spectral range of the internal resonators is larger than the wavelength range of interest, and to design the transmission wavelength resonances to surround the wavelength area of interest.

If the constructional practice requires a piece of material between the external cavities, i.e. the layer structure between the mirrors 18, 28 in FIG. 1, it possible to replace either of the mirrors 18, 28 with an anti-reflection coating. Thereby there will only be two cavities, now with a common separating mirror. The cavity including the anti-reflection coating and, thus, the extra piece of material will now probably be thicker than the other cavity and, thus, have a smaller free spectral range. Adjustments that effect the spectral performance is to be accounted for when evaluating this anti-reflection coating embodiment for a particular application.

FIG. 2 shows a transverse cross-section of this invention, where a cylindrical lens, 30, located in the internal resonator is used for compensation of beam divergence due to diffraction. In this embodiment, with optical fibers, the optical fibers will also act as focusing elements in the beam path. In FIG. 2 a conventional lens was drawn, but similar functionality could also be obtained using a Fresnel lens or other diffractive or refractive micro-optical elements.



FIG. 3 shows a drawing of an alternative embodiment of the present invention, in which actuators 17, 27 are used for controlling the distances between the mirrors in the external resonators. Specifically is meant the distance between mirrors 18 and 19 and the distance between mirrors 28 and 29. Using this mechanical actuation, the wavelength for which coupling occurs between the waveguides can be controlled. In this embodiment, mechanical mirror actuation is disclosed, but the tuning of the optical path length in the external cavities can also be performed by changing the refractive index of the materials in the external resonators.

A second feature of this embodiment is that the coupled cavity structure can be manufactured by sandwiching two identical or similar single cavity structures. Here the structure between mirror 19 and the dashed line 10 represent one cavity and the structure between the dashed line 10 and the mirror 29 represent the other cavity.

FIG. 4 shows the transmission (solid line) and coupling (dashed line) spectra for device embodiment where the outer mirrors 19, 29 and depicted in FIG. 3 are fully reflecting. For this particular example, light couples over between the waveguides for a wavelength of 1,545  $\mu\text{m}$ . At this wavelength, the coupling between the waveguides is 100% (0 dB) whereas the transmission is 0 ( $-\infty\text{dB}$ ). Thus, for this wavelength the invention operates as an ideal coupler. The transmission dips denoted 12 and 13, respectively, are due to that the internal cavity is resonant for those wavelengths. As shown in the graph, the transmission at those wavelengths is low (close to -40 dB). Thus, it is important that those transmission resonances are designed such that they do not appear within the wavelength region of interest. In this case, a useful wavelength region can be found approximately within the range of 1,53 and 1,56  $\mu\text{m}$ . If the device should work as an ideal wavelength-selective coupler, it is also important that there are no resonances due to the external resonators within the wavelength region of interest. Thus, to accomplish that, the free spectral range also for the external resonator should be larger than the wavelength range of interest. This puts a restriction on the maximum distance between the mirrors of

each external resonator. For the example in FIG. 4, no more resonances due to the external resonators appear than the one at 1,545  $\mu\text{m}$ .

5 The requirement to have large enough free spectral range for the external cavities, imposes restrictions on the maximum thickness of the optical waveguides. For some types of waveguides, it could be difficult to make them thin enough to accommodate for a large enough free spectral range. However, another embodiment according to the invention and applicable for such waveguides, is to have wider external cavities, but with different optical cavity thicknesses for the two external resonators. In this  
10 embodiment, coupling only occurs for wavelengths that simultaneously equal two times the cavity thickness divided by an integer. That is:

$$\lambda = \frac{2L_1}{m} = \frac{2L_2}{n}$$

15 where  $\lambda$  is the resonant vacuum wavelength,  $L_1$  and  $L_2$  are the optical thicknesses, i.e. the product of the refractive index and the geometrical thickness, and  $m$  and  $n$  are two arbitrary integers. Based on this Vernier principle it is now possible to design the cavity thicknesses such that only one wavelength is resonant for both cavities for the wavelength range of interest, even though each cavity can have many  
20 resonances within the wavelength range of interest. Another advantage of using the Vernier principle is that the tuning range for the optical thickness is smaller in this case, as for each external resonator there could be many different resonance orders, which is realised by means of the different values of  $m$  and  $n$  in the equation above, within the wavelength range of interest. Thus, to provide coupling at a certain  
25 wavelength, it is only necessary to tune the closest resonance order of each resonator to the specified coupling wavelength.

FIG. 5 shows transmission spectrum (solid line) and coupling spectrum (dashed line) for the embodiment having wider external cavities of different thickness. As in  
30 FIG. 4 the resonance wavelength common to both cavities is selected to be 1,545

$\mu\text{m}$ , and shows the transmission dip 10 and the coupling peak 11. In the spectra, the peaks 12, 13 are recognized due to resonances of the internal resonator. Furthermore, the coupling peaks 14, 15, 18 are due to resonances in one of the cavities, whereas the coupling peaks 16, 17 are due to resonances of the other cavity. It should be noticed that even though the transmission is high, the coupling at the peaks 14, 15 could be too high for some coupler applications. However, if the coupler device is only used as a two-port attenuator, the coupling peaks 14, 15 are of no relevance.

An important property of a wavelength-selective coupler is the filter function of the device. That is, what wavelengths around a center wavelength that will provide sufficient coupling between the waveguides. A system requirement is often that the filter function should have a top-hat shape, with sharp edges surrounding a wavelength region with more or less uniform transmission/coupling properties. To obtain the sharp edges of the filter, it is required that the finesse of the cavity is high, which implies that the mirror losses and all other losses should be very low. To provide a wavelength region with uniform transmission/coupling properties between the sharp edges, the external cavity mirrors could be aligned to provide a slight wedge along the longitudinal optical axis. Thereby there will be slightly different cavity thicknesses along the waveguide, which broadens the spectral profile. An alternative embodiment to obtain a broadened spectral profile is to manufacture the grating with a slight chirp of the grating period. Thereby light will couple out in slightly different angles along the waveguide, and, thus, experience slightly different resonance wavelengths along the waveguide.

FIG. 6 shows yet an alternative embodiment of the present invention, where the deflector regions consist of superposed crossed tilted gratings. The idea with these crossed gratings is that light is coupled out both upwards and downwards from these gratings. Thus, light that couples upwards from the waveguide will interfere with light that couples out downwards from the waveguide and that subsequently reflects

upwards again. Depending on the phase difference between these two waves, they could interfere constructively or destructively. If the two superposed tilted gratings are of equal strength and if the two outcoupled waves interfere destructively, there will be no resulting field in the external cavity. Thus, in addition to wavelength

5 tuning, the coupling between the waveguides can be controlled by tuning the position of the waveguide between its surrounding mirrors. To accomplish hitless tuning with these crossed gratings, the waveguide is first tuned to a position such that the outcoupled waves will interfere destructively. Then the optical thickness of the cavity is tuned from the initial resonance wavelength to the final resonance wave-

10 length, all the time keeping the waveguide in a position giving destructive interference for the outcoupled waves. At the final cavity thickness, the waveguide is tuned to a position such that the outcoupled waves interfere constructively. Notice that to be able to tune both the cavity thickness and the waveguide position within the cavity, it is required that either both mirrors of each cavity can be moveable or that

15 one mirror and the waveguide of each cavity can be moved. For the embodiment in FIG. 6, all mirrors have actuators 15, 17 and 25, 27 respectively.

The wavelength-selective optical coupler element, described in this invention is highly polarization-dependent. Light polarized orthogonally to the longitudinal and

20 the transverse optical axes with reference numerals 1, 2 in FIG. 1, will couple between the waveguides. Light polarized along the transverse optical axis will not experience any coupling. Thus, to make a wavelength-selective coupler device that operates properly independently of state of polarization of the input light, an embodiment consisting of two arrays 10 of wavelength-selective coupler elements is

25 shown in FIG. 7. In this embodiment, each element in the array is tuned to couple a certain wavelength between the waveguides. The upper array couples the component of the polarization aligned orthogonally to the longitudinal and transverse optical axis. The polarization component aligned with the transverse optical axis propagates through the upper array without any coupling. To keep the polarization state,

30 polarization-maintaining fiber 12 is used to guide the light from the output of the

upper array to the polarization twister 11 and from the polarization twister to the lower array. The polarization twister rotates the polarization planes 90 degrees, such that the light that propagated unaffected by the upper array, will now couple for the resonant wavelengths in the lower array, whereas the polarization component that experienced coupling in the upper array will propagate unaffected in the lower array. Thus, having passed through both arrays, all light at resonant wavelengths have coupled between the two waveguides. It will be understood by those of ordinary skill in the art that numerous other embodiments for polarization-independent operation are conceivable within the scope of the invention. Moreover, as shown in FIG. 7, due to the small size and the low loss of each element, a plurality of wavelength-selective couplers can be cascaded after each other.

To be able to simultaneously couple light signals at the same wavelength from the express waveguide to the drop waveguide and from the add waveguide to the express waveguide, it is important that there is a very small amount of the original light signal left in the waveguide, before light from the other waveguide is coupled into that waveguide. If there is too much of uncoupled light left, there will be coherent cross-talk between the uncoupled and the coupled signals. To increase the attenuation of the signal before adding a new signal, FIG. 8 shows an embodiment with wavelength blockers used between the drop and the add elements. In this embodiment channels are dropped using a drop element and added to the other waveguide using an add element. Before adding new signals to the channel that had been dropped, the remaining signal in the channel must be attenuated. This channel-specific attenuation is made using the wavelength blocker. As mentioned in the discussion concerning FIG. 5, the wavelength-specific attenuator – the wavelength blocker – can also be implemented using the present invention.

FIG. 9 shows how single channel optical add/drop elements can be used for demultiplexing the dropped signals and multiplexing several channels to be added. The advantage with this multiplexing scheme is that the channels can be reconfigured

depending on the network traffic situation. Included in FIG. 9 is also a wavelength blocker for the removal of remaining signals in dropped channels.

FIG. 10 shows an embodiment of a reconfigurable optical add/drop multiplexer, including reconfigurable (de-)multiplexing of the dropped/added channels. For this embodiment it was assumed that the add/drop functionality (denoted "Add/drop") can be implemented without wavelength blocker.

The invention has been described with the aid of some preferred embodiments as shown on the drawings. Nevertheless, it will be understood by those of ordinary skill in the art that numerous modifications and alterations of the described embodiments, as well as other embodiments, are conceivable within the scope of the invention. The scope of the invention is defined by the claims.

3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
21

## Claims

1. A device for optical coupling comprising

5 first and second optical waveguides (13, 23) extending longitudinally with cores (14, 24) adapted to guide optical radiation (15),

first resonator means, laterally surrounding the first waveguide, comprising first and second resonator members (18, 19), and second resonator means, laterally surrounding the second waveguide, comprising third and fourth resonator members (28, 29),

10 **characterised in that**

first and second deflector means (16, 26), adapted to couple radiation propagating in the respective first and second waveguides with common radiation modes (30), which modes are defined by adjustable geometrical and material properties of the device, so as to obtain wavelength selective coupling of radiation guided by the first and second waveguides, provided the resonator means are tuned to the same resonance wavelength.

2. A device for optical coupling according to claim 1, **characterised in that**

20 at least one of the waveguides comprise optical fibers or planar optical waveguides.

3. A device for optical coupling according to claim 1, **characterised in that**

25 at least one of the deflector means includes a periodic refractive index modulation grating, preferably inscribed in the light-guiding regions of said optical waveguide.

4. A device for optical coupling according to claim 3, **characterised in that**

the deflector means includes optical Bragg grating, preferably tilted.

5. A device for optical coupling according to claim 1, **characterised in that**

comprised optical elements, such as the resonator means, the optical waveguides and the deflector means are arranged to have mirror symmetry with respect to a plane defined by the longitudinal and transverse optical axes (1, 2).

5

6. A device for optical coupling according to any of preceding claims, **characterised in that**

at least one of the resonator members is a mirror chosen from a group consisting of: dielectric multilayer mirror, metal mirror and metal mirror with dielectric coating.

10

7. A device for optical coupling according to claim 1, **characterised in that**

a separation between the first second resonator means provides an internal resonator means, and

15

the separation is selected to locate the internal resonator resonance at wavelengths outside the range in which the resonator means are made resonant.

8. A device for optical coupling according to claim 1, **characterised in that**

the resonance wavelength of each of the resonator means is controllable by adjusting the optical distance, i.e. the product of the geometrical distance and refractive index, between the first and second resonator members and the third and fourth resonator members, respectively.

20

9. A device for optical coupling according to claim 1, **characterised in that**

the resonator means are made resonant to radiation having a wavelength within the range of 1,260 to 1,675  $\mu\text{m}$ .

25

10. A device for optical coupling according to claim 1, **characterised in that**

the resonator means are made resonant to radiation having a wavelength within anyone of the ranges of: 1,260 to 1,360  $\mu\text{m}$  (O-band), 1,360 to 1,460  $\mu\text{m}$

30



(E-band), 1,460 to 1,530  $\mu\text{m}$  (S-band), 1,530 to 1,565  $\mu\text{m}$  (C-band), 1,565 to 1,625  $\mu\text{m}$  (L-band) or 1,625 to 1,675  $\mu\text{m}$  (U-band).

5 11. A device for optical coupling according to claim 3 or 4, **characterised in that**  
the respective deflector means include two superposed Bragg gratings,  
having essentially orthogonal grating vectors.

10 12. A device for optical coupling according to claim 11, **characterised in that**  
the superposed gratings are adapted to deflect light in the same longitu-  
dinal direction but in opposite transverse directions and simultaneously collect  
light arriving from the same longitudinal direction but from opposite transverse  
directions.

15 13. A device for optical coupling according to claim 3, **characterised in that**  
the deflector means includes transversally asymmetric optical Bragg  
grating.

20 14. A device for optical coupling according to claim 1, **characterised in that**  
at least one of the deflector means includes a grating comprising blazed  
corrugations having alternating projections and spaces along a wall parallel to  
the longitudinal axis of the respective waveguides.

25 15. A device for optical coupling according claim 11, **characterised in that**  
interference between waves coupled out from each of the gratings is  
controllable by adjusting the geometrical position or refractive index of any of  
the waveguides the resonator means.

30 16. A device for optical coupling according to anyone of claims 8 or 15, **character-**  
**ised in that**  
the refractive index is controllable by adjusting at least one parameter

chosen from a group consisting of : temperature, injection of charge carriers, application of an electric voltage and application of mechanical stress.

17. A device for optical coupling according to anyone of preceding claims, **characterised in that**

5

the spectral selectivity is controllable by changing mirror separation along the longitudinal optical axis for the first and second resonator means, or by having a chirped grating period in the first and second deflector means.

10 18. A device for optical coupling according to claim 1, **characterised in that**

beam transformation means is arranged between the resonator means to reduce transverse beam divergence, whereby the means is chosen from a group comprising: a conventional, preferably cylindrical, lens, a Fresnel lens, a refractive or diffractive optical element.

15

19. A device for optical coupling according to claim 1, **characterised in that**

each of the first and said second resonator means has different optical thickness, while being resonant for the same wavelength.

20 20. A device for optical coupling according to claim 1, **characterised in that**

the orders of resonance of at least one of the resonator means is adjustable so as to tune the coupling wavelength.

25

21. An array of devices for optical coupling according to anyone of preceding claims,

**characterised in that**

each device for optical coupling is adapted to couple any wavelength within a predetermined wavelength range.

22. A method of fabricating a device for optical coupling according to anyone of preceding claims,  
**characterised by**  
sandwiching two essentially identical structures, each including an external resonator and an optical waveguide with a deflector.
- 5
23. Use of a device for optical coupling according to anyone of claims 1-20 as a two-port spectrally tunable transmission filter.
- 10
24. Use of a device for optical coupling according to anyone of claims 1-20 as a two-port spectrally selective attenuator.


12345678910

**Abstract**

The present invention relates to a device, method, array and use of the device for optical coupling. The device comprises first and second optical waveguides (13, 23) extending longitudinally with cores (14, 24) adapted to guide optical radiation (15), first resonator means, laterally surrounding the first waveguide, comprising first and second resonator members (18, 19), and second resonator means, laterally surrounding the second waveguide, comprising third and fourth resonator members (28, 29). The invention is characterised in that first and second deflector means (16, 26) are adapted to couple radiation propagating in the respective first and second waveguides with common radiation modes (30), which modes are defined by adjustable geometrical and material properties of the device, so as to obtain wavelength selective coupling of radiation guided by the first and second waveguides, provided the resonator means are tuned to the same resonance wavelength.

15

(Fig 1 for publication)





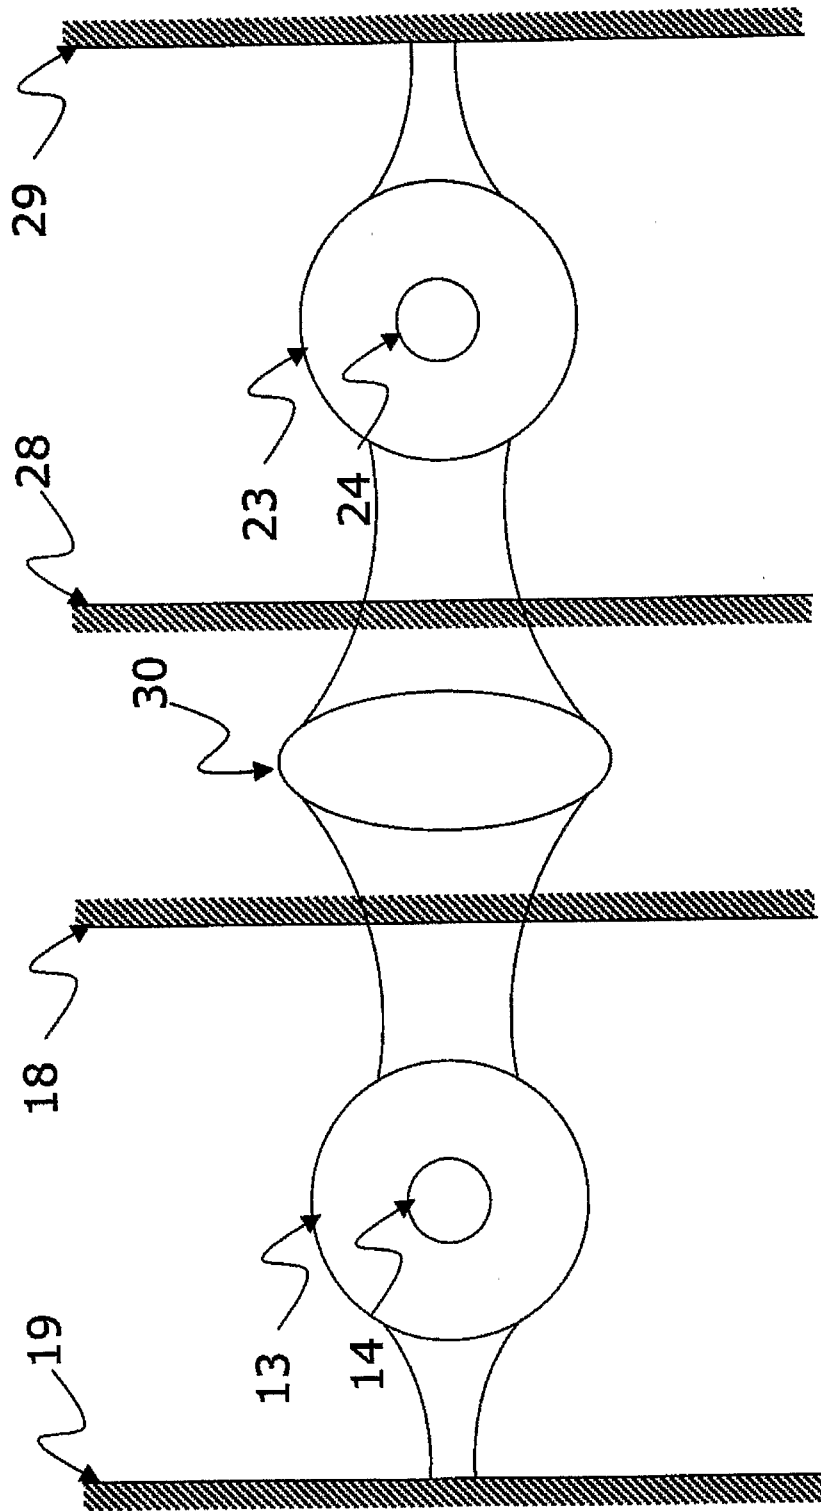


FIG. 2

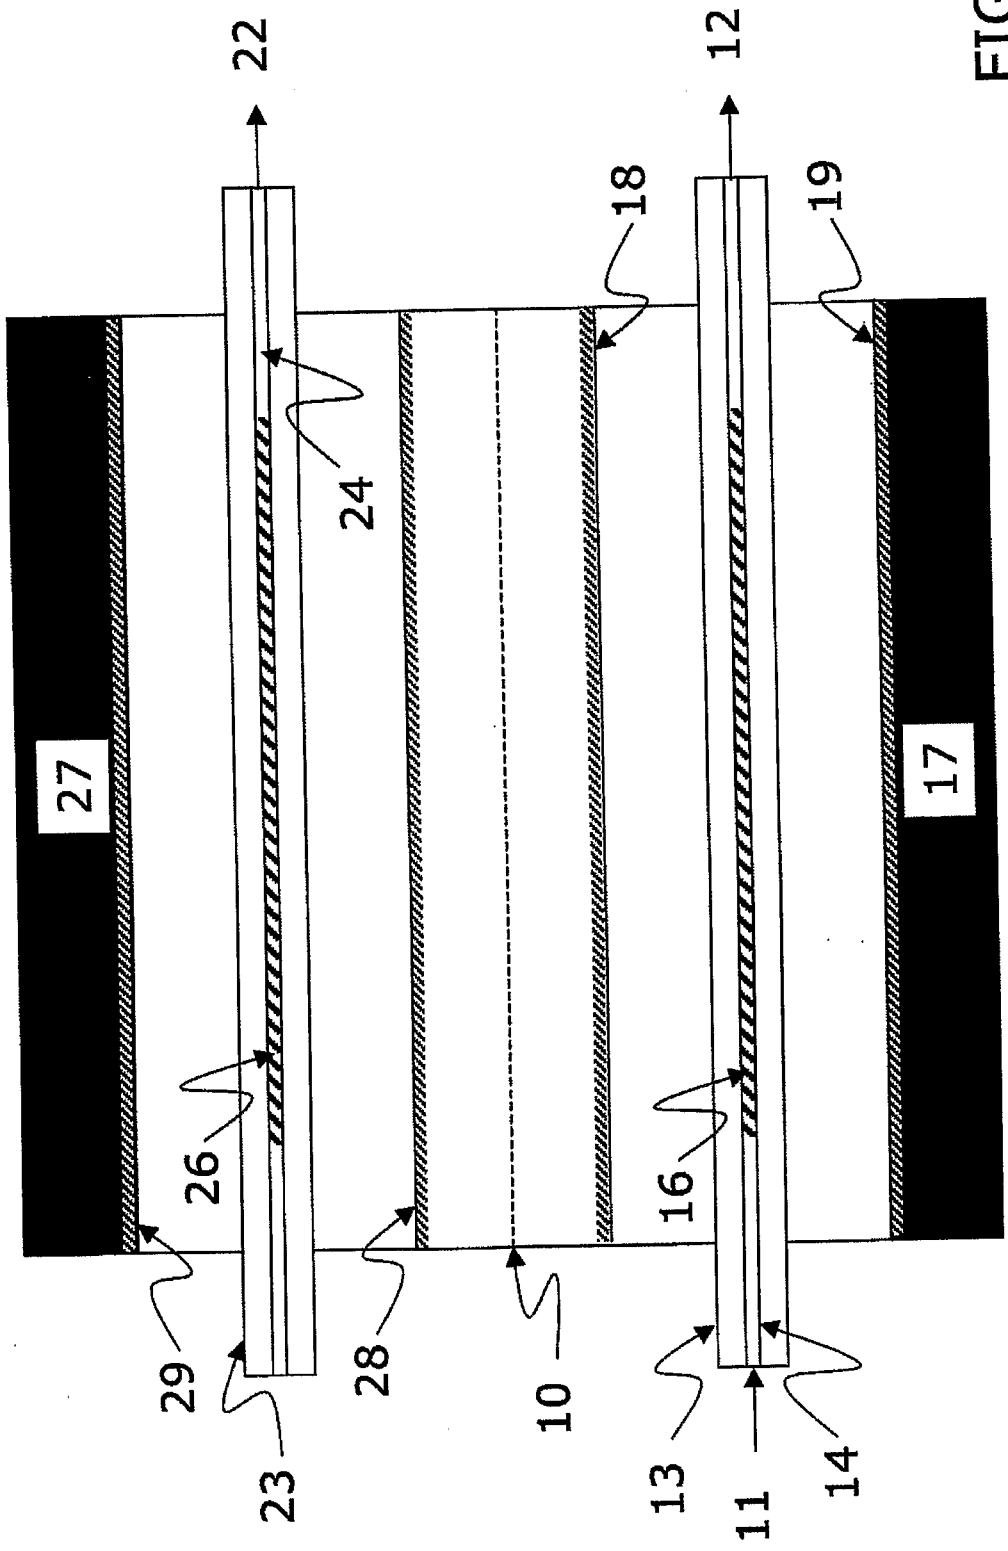


FIG. 3

030303-3

PRV03-12-01

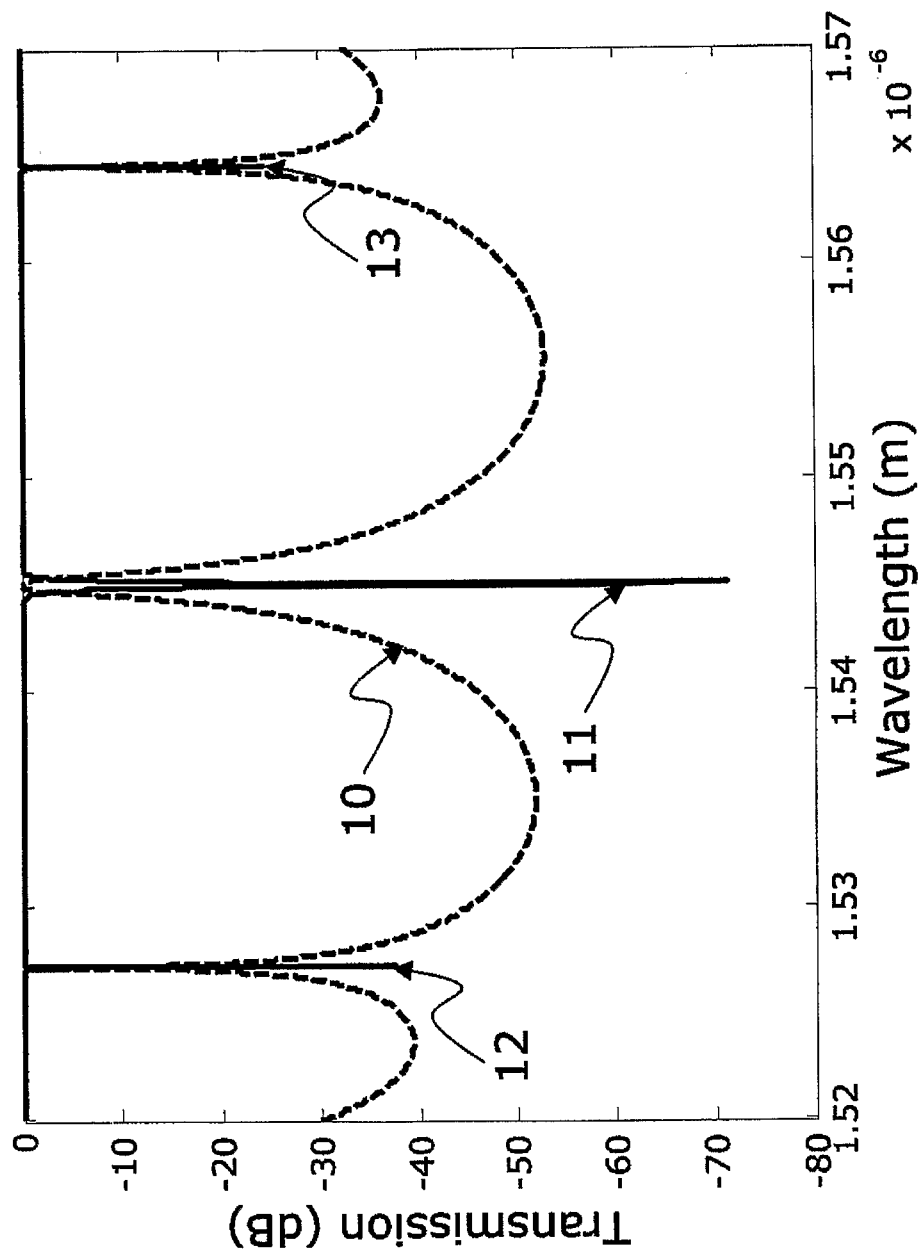


FIG. 4



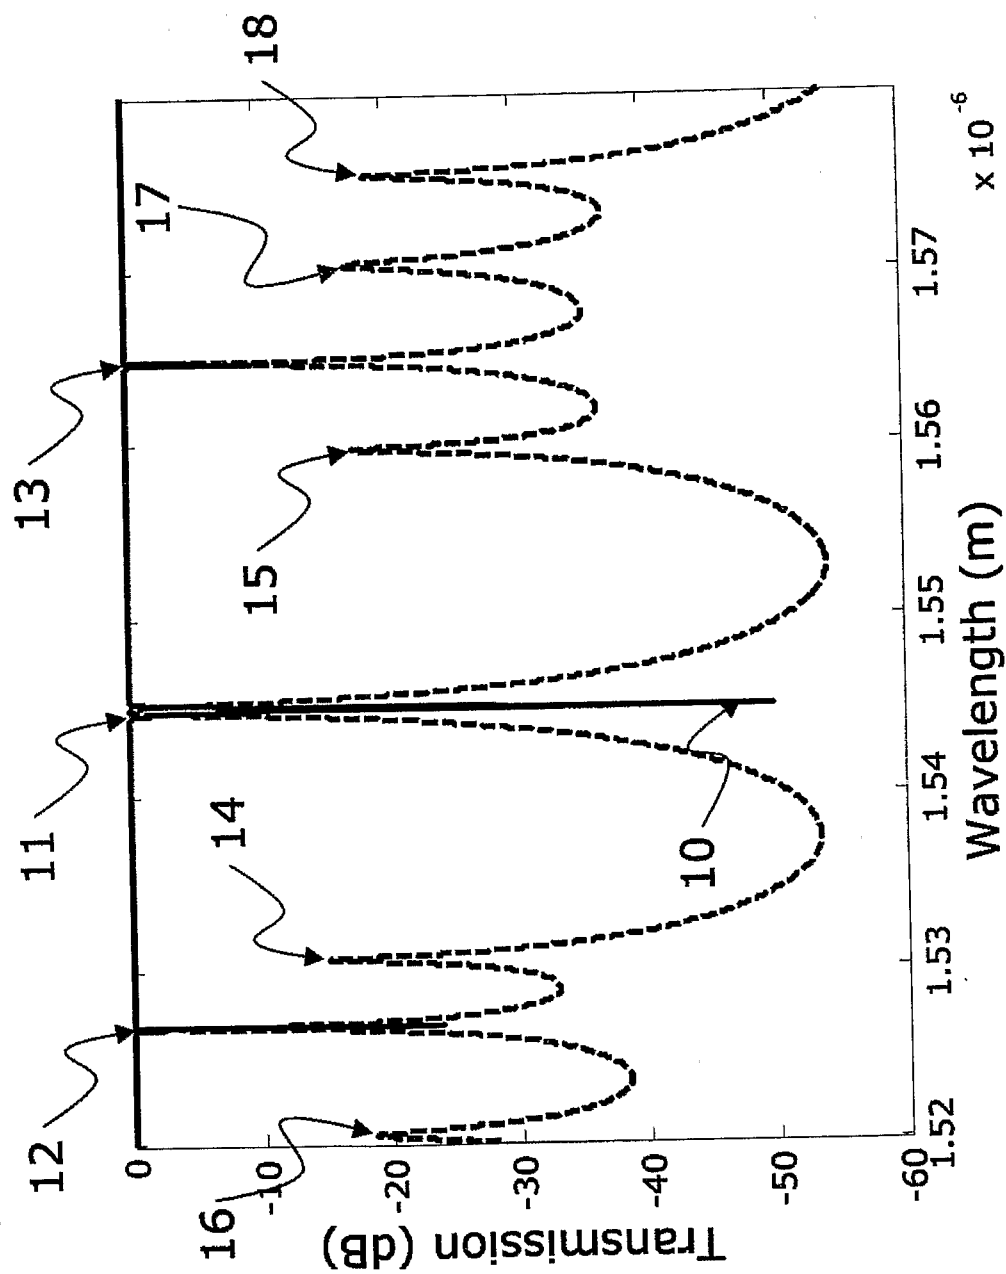


FIG. 5

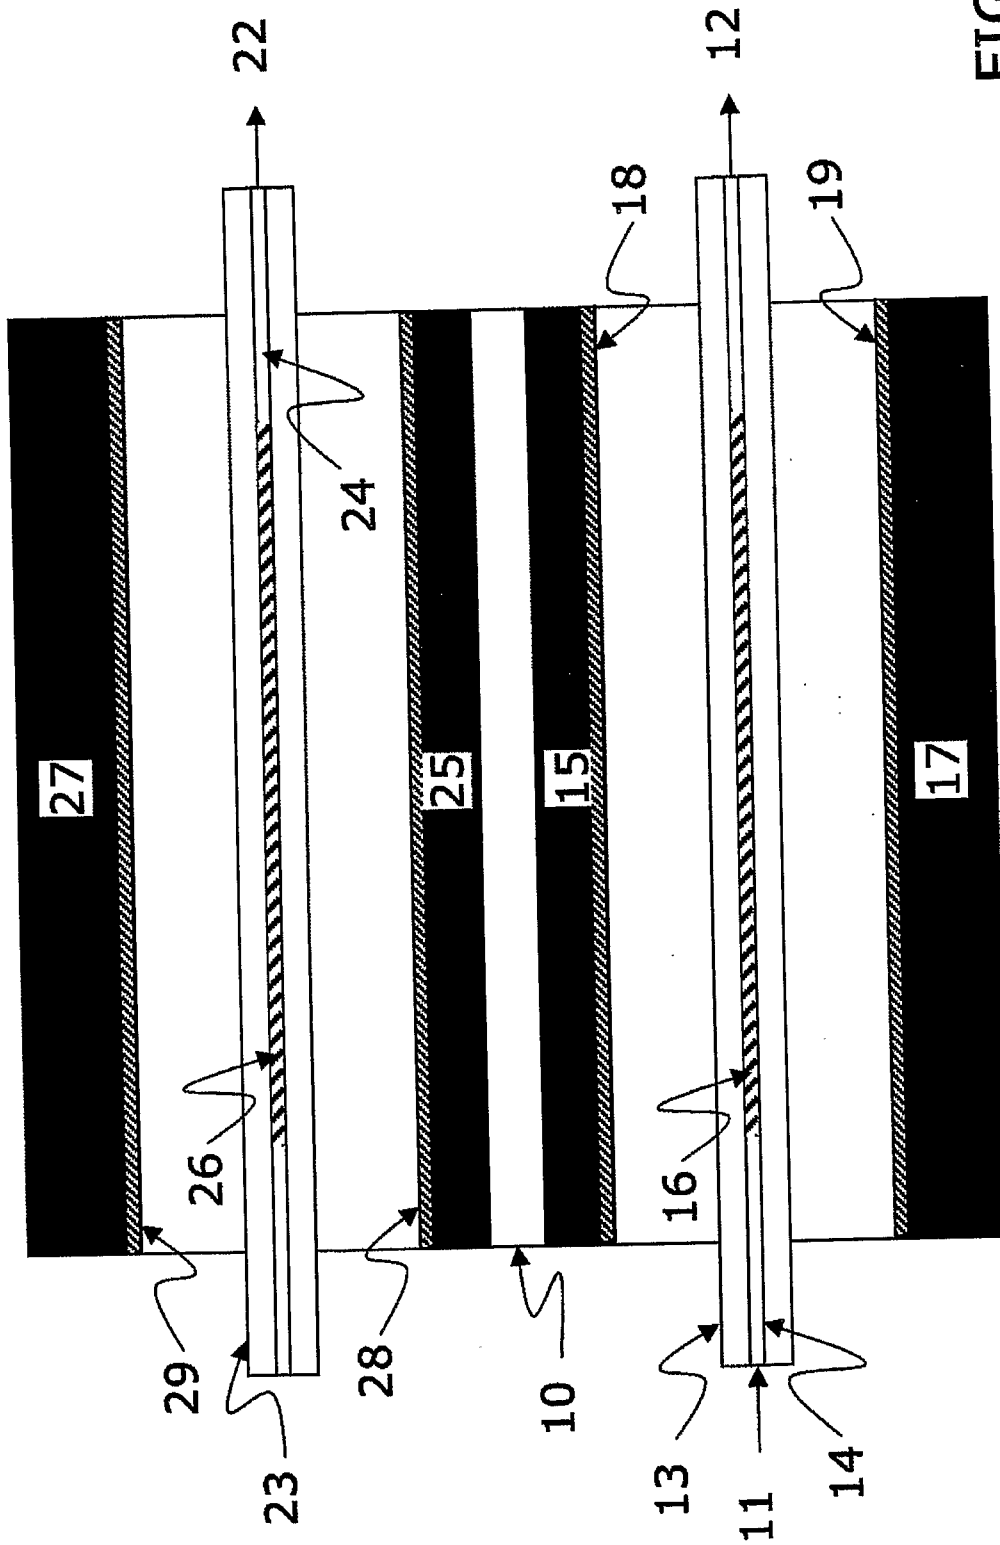
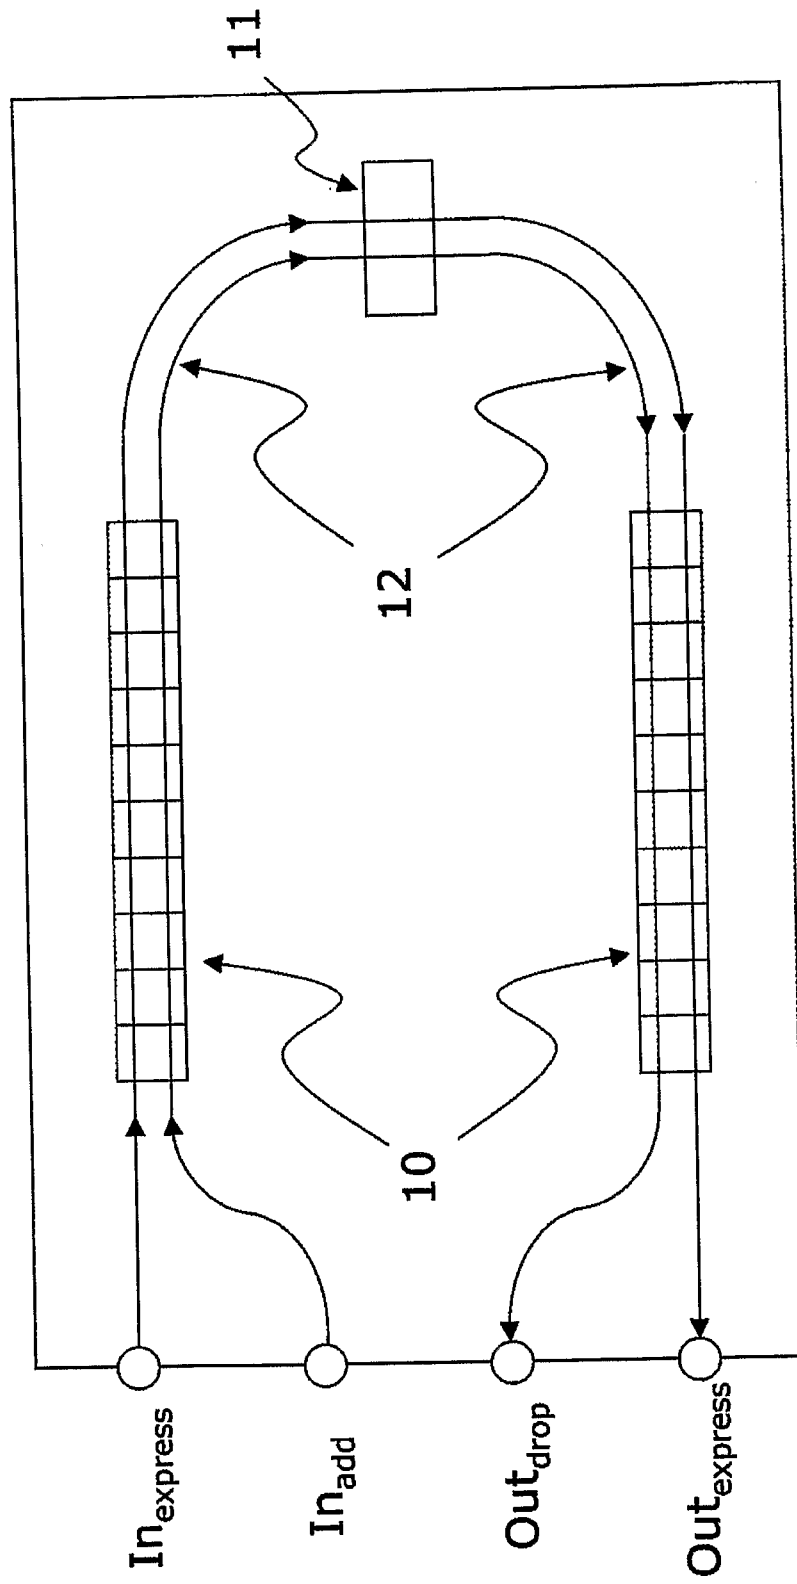


FIG. 6



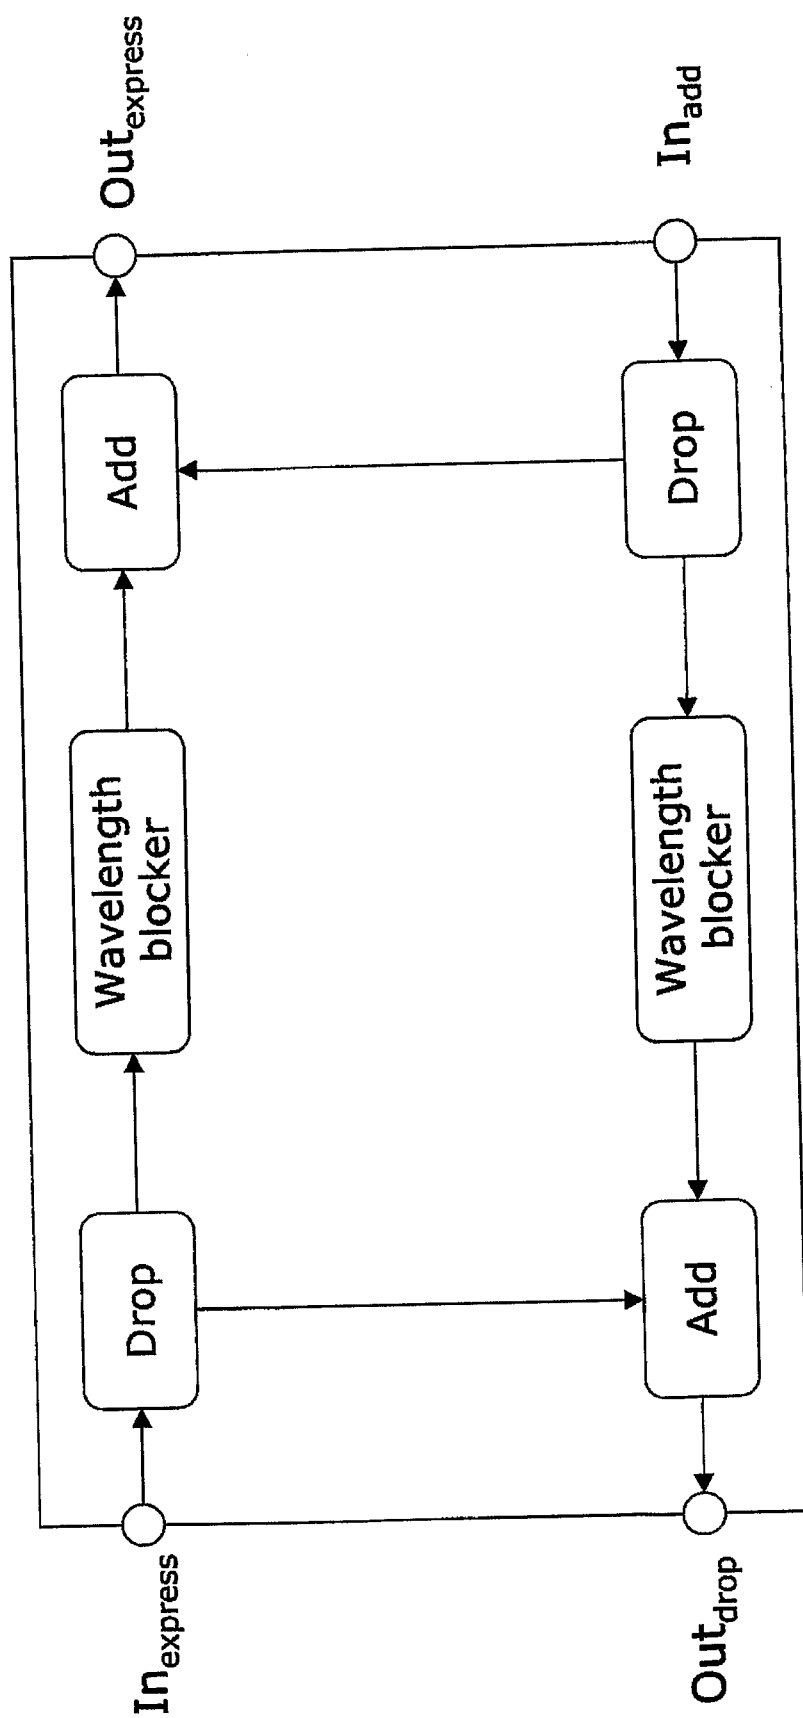


FIG. 8

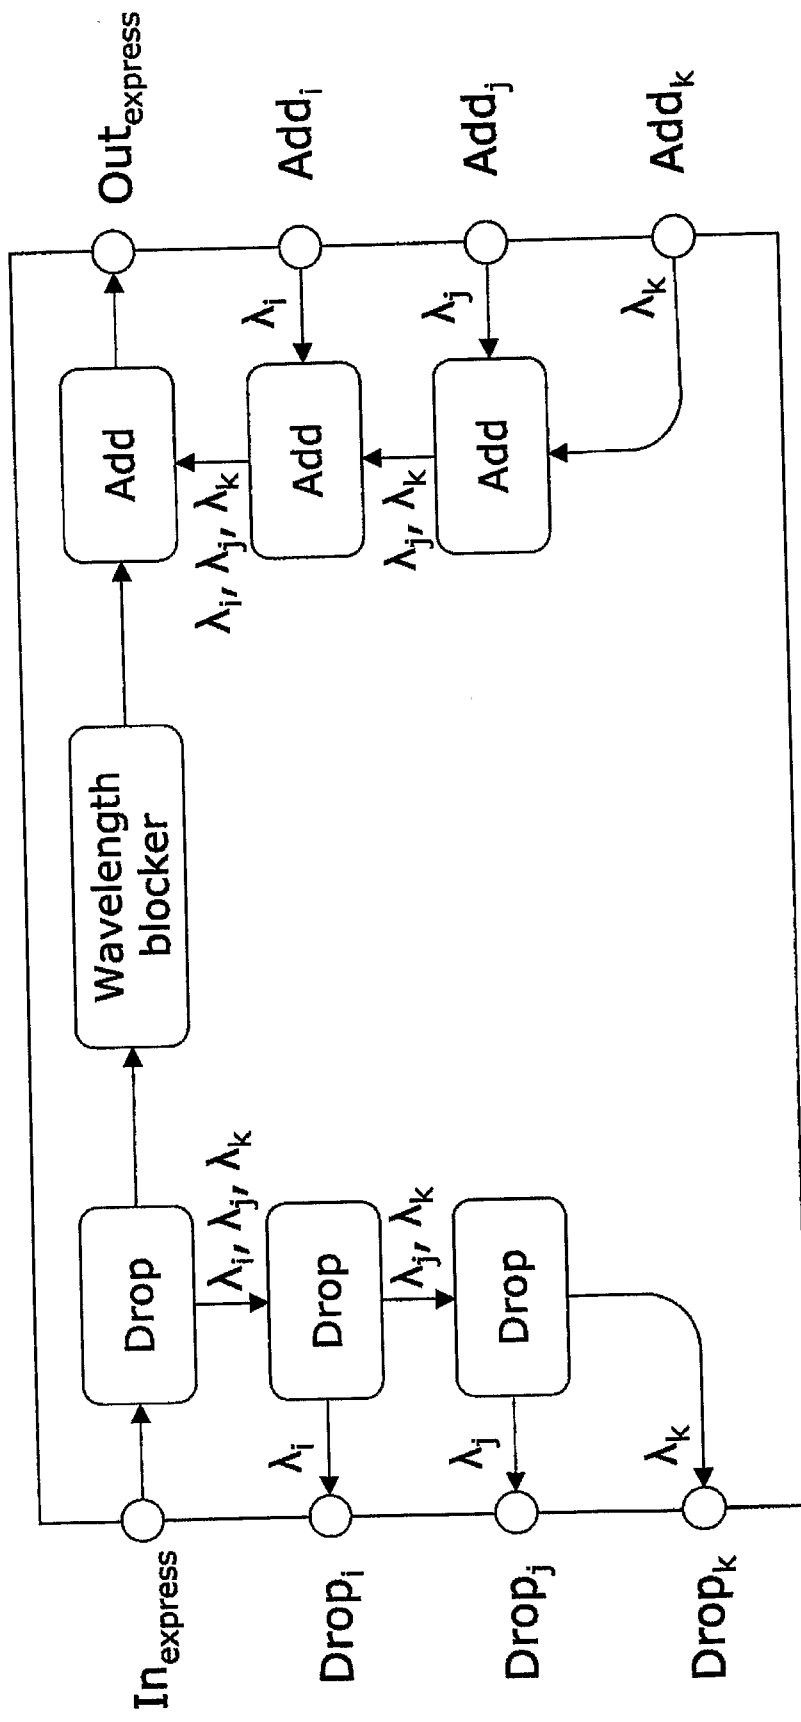


FIG. 9

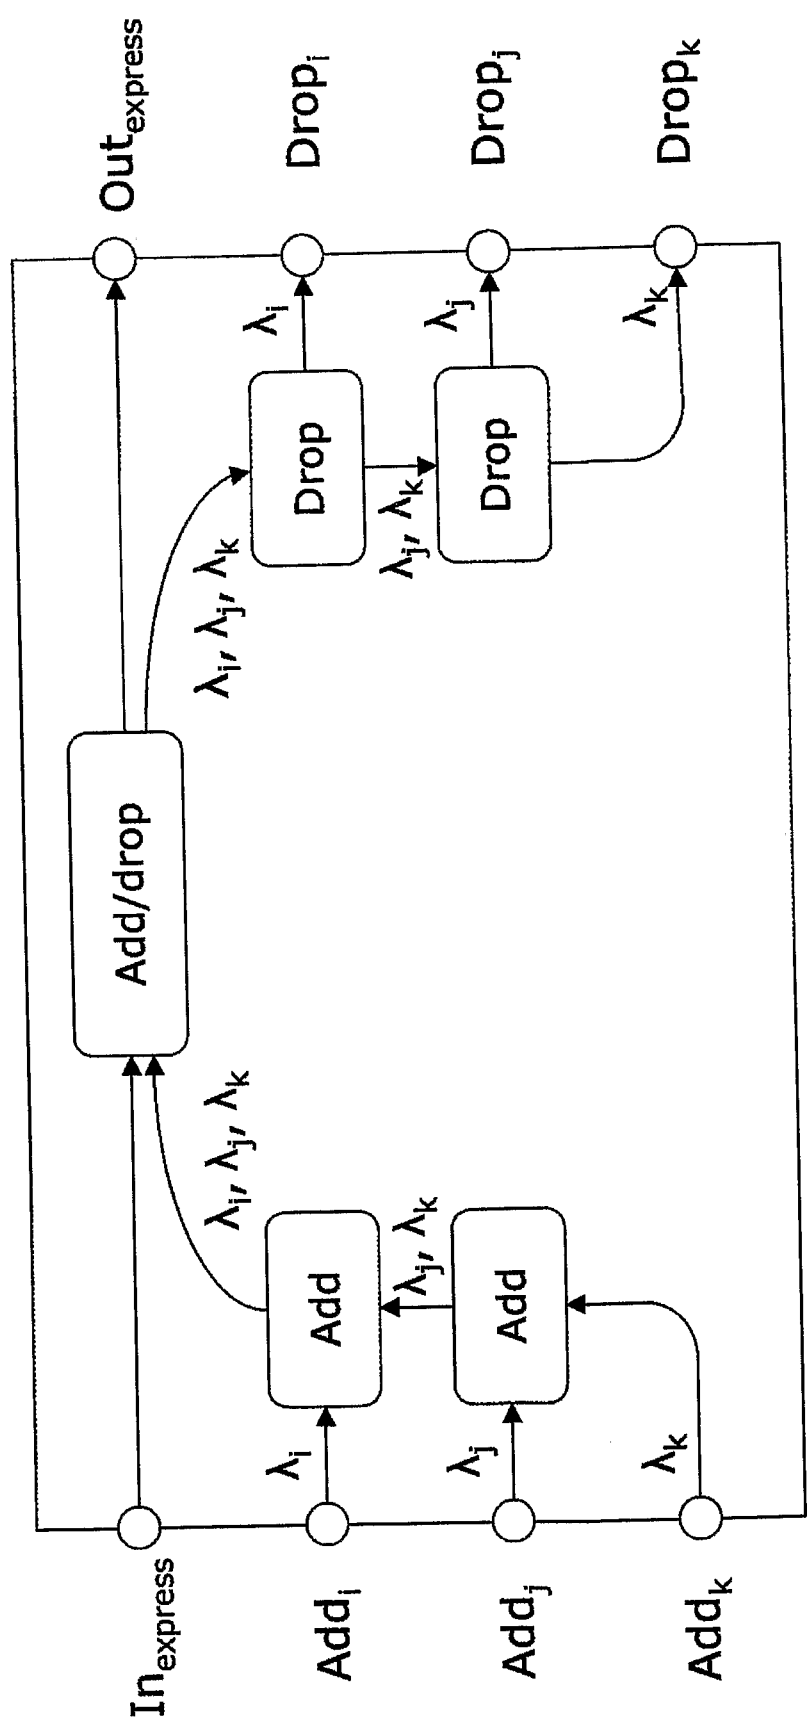


FIG. 10